

Stone Age Concrete Games, Inc.

Concrete Foosball Table

Proprietary

Specified Installation: Bolts together with standard hand tools and supplied vandal resistant fasteners. Table installs quickly on flat hard surface such as concrete and asphalt without sub grade construction. Shuffleboard table should be bolted to existing or new concrete. Installation time is approximately 2 hours.

Sizes: 12' x 35' x 33"H

16' x 35' x 33"H

Weight: 12' Table - 4,200 pounds

16' Table - 5,000 pounds

Concrete: Table and legs are pre cast 6000+ PSI concrete with steel reinforcement and fiber reinforcement.

Connectors: 3/8" black anodized button head bolts

Recommended Maximum Loads: Table top 100psf live load, 420 lb point load

Threaded Inserts: All bolt connections use Zamac (rustproof) cast in place threaded anchors.


Legs: 6000 psi Concrete reinforced with #4 (1/2") rebar and 15 lb per yard Master Fiber CB 2200 and Fiber Force 150 mix fiber reinforcement.

Top: Solid 6000psi+ Concrete. Top is reinforced with 4-4-4-4 welded wire reinforcing steel and 15 pounds per yard Master Fiber CB 2200 and Fiber Force 150 mix fiber reinforcement. Concrete tops Is acid stained to look like wooden boards. There is color variation. Standard finish is precision cast and polished finish0Edges are cast 1/4" Chamfer for incidental contact safety.

Steel Components: Steel runners are 2x2" square 1/8" wall tubing with black powder coating.

Wall Sides: Outdoor Carpet on walls of the Shuffleboard table to prevent pucks fram damaging the concrete when used incorrectly.

SHUFFLEBOARD SHOP DRAWING

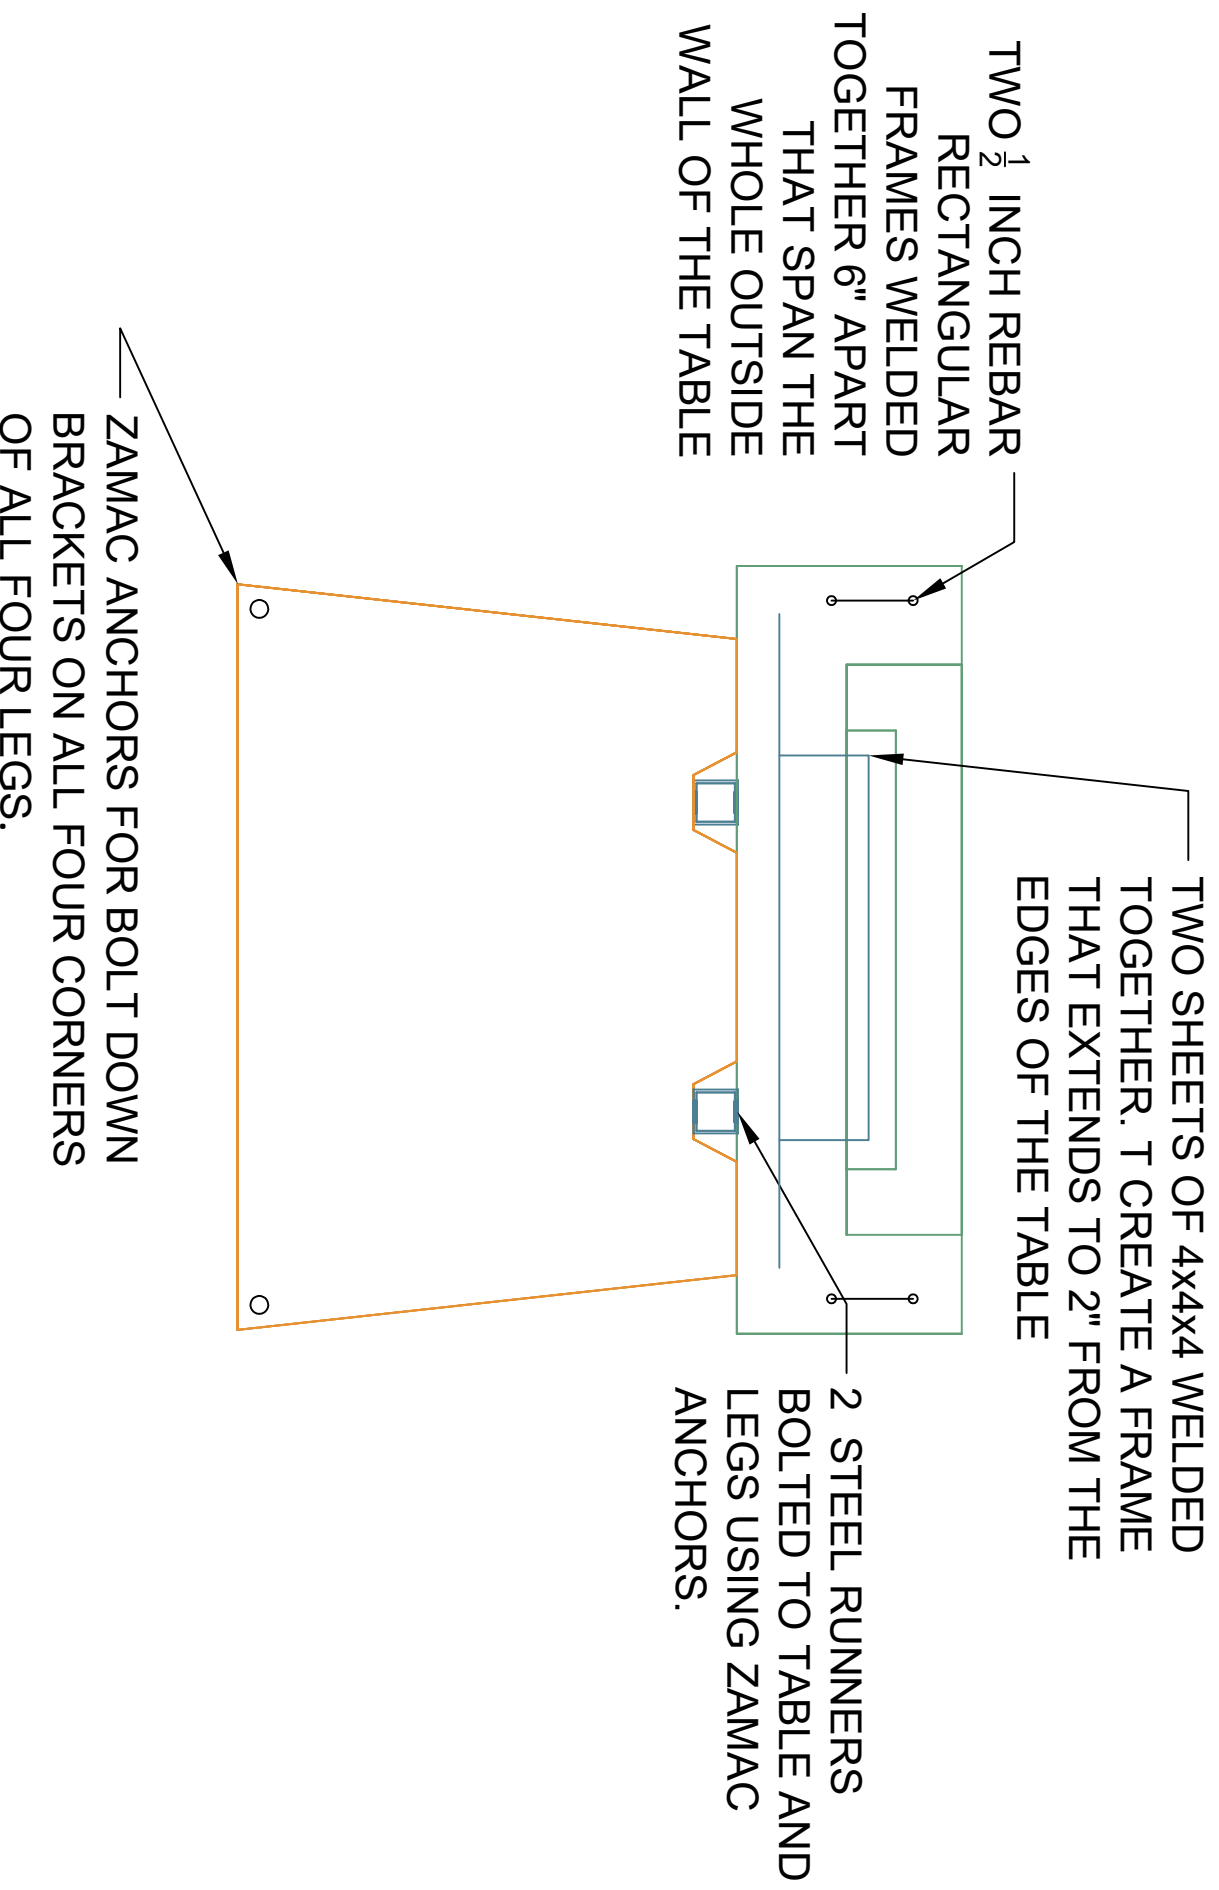

Notes: ALL Concrete is 6000+ PSI with Masterfiber Mac 2200, FiberMesh 150 fiber reinforcement, and MasterFinish RL211.

Stone Age Concrete Games Inc.
For company use only.
Drawn by Joshua James.